


MODEL NUMBER CONSTRUCTION

**BDT1448-NC**



NOTES

1. THERMOSTEAM BLOWDOWN TANKS ARE AVAILABLE TO MEET ASME SECTION VIII, DIV 1 WITH MAWP OF 150 PSIG OR AS NON-CODE CONSTRUCTION WITH MAWP 75 PSIG.
2. ALL OPENINGS ARE LEFT UNPLUGGED FOR FIELD PIPING.
3. 1" COUPLINGS ARE PROVIDED INSIDE ANGLE LEGS TO ALLOW CONNECTION OF 1" PIPE LEG EXTENSIONS.

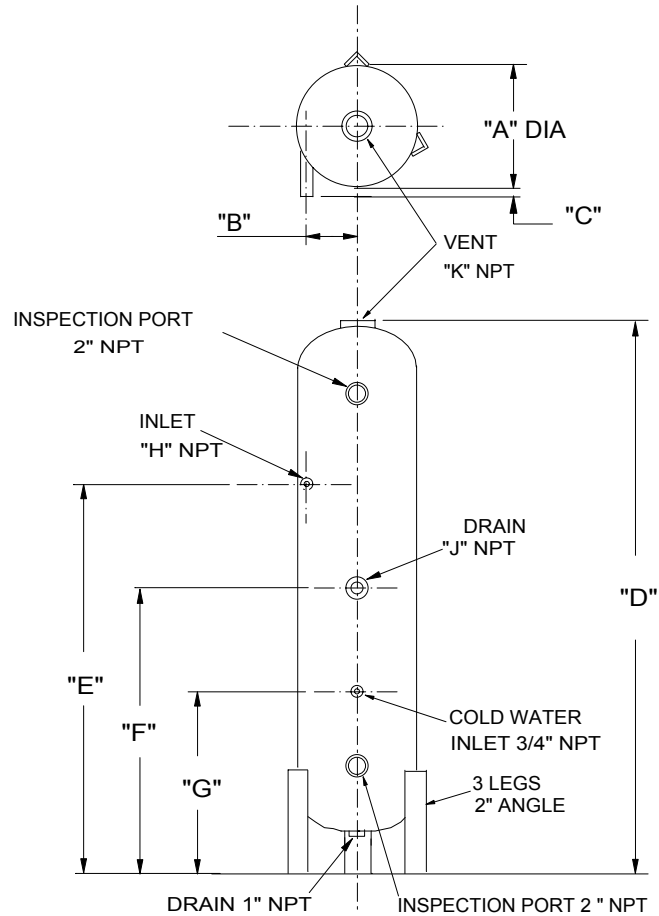

MODEL	VOLUME GAL *	SHIP WT. LB	DIMENSIONS IN INCHES									
			A	B	C	D	E	F	G	H	J	K
BDT1448	18.0	250	14	5.5	1	64	45	33	21	1	1.5	2.5
BDT1836	23.1	330	18	7.3	2	56	39.5	30.3	21.5	1.5	2	3
BDT1848	29.7	390	18	7.3	2	68	51.5	36.3	27.5	1.5	2	3
BDT2436	41.1	420	24	9.5	2	61	44	35	26	2	2	4
BDT2448	52.9	515	24	9.5	2	73	53	41	32	2	2	4
BDT2460	64.6	610	24	9.5	2	85	59	47	38	2	2	4
BDT2472	76.4	705	24	9.5	2	97	65	53	44	2	2	4

\* VOLUME CALCULATED TO HALF OF TANK HEIGHT.

**ThermoSteam Systems, Inc.**

DWN	TNR	DATE	4/11/03	TITLE	BLOWDOWN TANK, 14" x 48"		
REV		DATE		SCALE	NTS	DWG. NO.	DIMBDT